




FEATURES


- SINGLE LEVER WITH HOT & COLD INDICATOR INSERT
- AVAILABLE IN POLISHED CHROME
- 4" CENTER-SET MOUNT
- STAINLESS STEEL WASHERLESS BALL VALVE
- POP-UP DRAIN ASSEMBLY INCLUDED
- MAXIMUM FLOW RATE: 1.5 GPM/5.7 LPM @ 60 PSI
- SOLID BRASS & COPPER WATERWAYS
- FACTORY PRESSURE TESTED
- cUPC CERTIFIED / WaterSense® CERTIFIED
- LOW LEAD COMPLIANT



NFINITY

06-4579PBATHROOM FAUCET



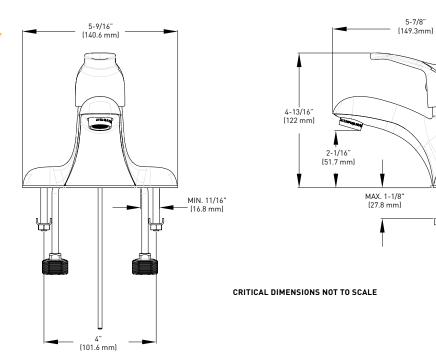

CONSTRUCTION

- METAL CONSTRUCTION WITH POLISHED CHROME FINISH
- BRASS VALVE BODY

MOUNTING

- DESIGNED TO INSTALL THROUGH 3 HOLES, 11/16" (17mm) MIN.
 DIA. WITH 4" (102mm) CENTERS, ON DECKS UP TO 1-1/8" (28mm)
- DESIGNED TO INSTALL MIN 1-7/8" (47mm) FROM VALVE CENTERLINE TO BACK SPLASH

INLET

 0.315" O.D. COPPER TUBE INLETS WITH 1/2"-14 NPSM ADAPTERS

OPERATION

- PIVOT ACTION LEVER STYLE HANDLE
- OPERATES WITH LESS THAN 5 LBS. OF FORCE

REPLACEMENT PARTS AVAILABLE

FOR PARTS NOT LISTED CONTACT CUSTOMER SERVICE


| REPLACEMENT PARTS | PART NUMBER | |
|--|----------------|--|
| 1 - AERATOR | 06-RP0005 | |
| 2 - UNIVERSAL BALL CARTRIDGE | 06-RP0081 | |
| 3 - POP-UP ASSEMBLY (WITHOUT LIFT ROD & KNOB) | 06-RP0204 | |
| 4 - LIFT ROD & KNOB | 06-RP0709 | |
| 5 - INDEX | 06-RP0053 | |
| 6 - SET SCREW | 06-RP0721 | |

WATER-CONTROL MECHANISM

- ROTATING STAINLESS STEEL BALL TYPE WITH NON-METALLIC SEATS
 FLOW
- AERATOR LIMITS MAXIMUM FLOW RATE TO 1.5 GPM MAX. (5.7 L/MIN.) @ 60 PSI CODES/STANDARDS APPLICABLE
- ASME A112.18.1 / cUPC
- ANSI/NSF 61/9
- LOW LEAD COMPLIANT

GUARANTEE

- LIMITED LIFETIME GUARANTEE AGAINST DEFECTS IN MATERIAL AND WORKMANSHIP TO ORIGINAL CONSUMER PURCHASER
- 5 YEAR WARRANTY IF USED IN INDUSTRIAL, COMMERCIAL AND BUSINESS INSTALLATIONS

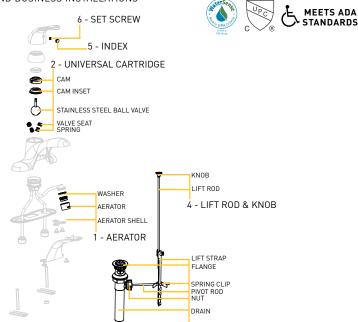



| DESCRIPTION | POLISHED CHROME | CASE QTY. |
|-------------------------------------|--------------------|--------------|
| SINGLE LEVER HANDLE BATHROOM FAUCET | 06-4579P | 6 |

3 - POP UP DRAIN ASSEMBLY