

INFINITY

06-8705

KITCHEN FAUCET




SPECIFICATIONS

- › TWO LEVER HANDLES
- › HIGH-ARC SWING SPOUT WITH 180-DEGREE ROTATION
- › WASHERLESS CARTRIDGE
- › THREE HOLE 8" INSTALLATION
- › MAXIMUM FLOW RATE: 1.8 GPM/6.8 LPM @ 60 PSI
- › FACTORY PRESSURE TESTED

- › cUPC CERTIFIED

CRITICAL DIMENSIONS NOT TO SCALE

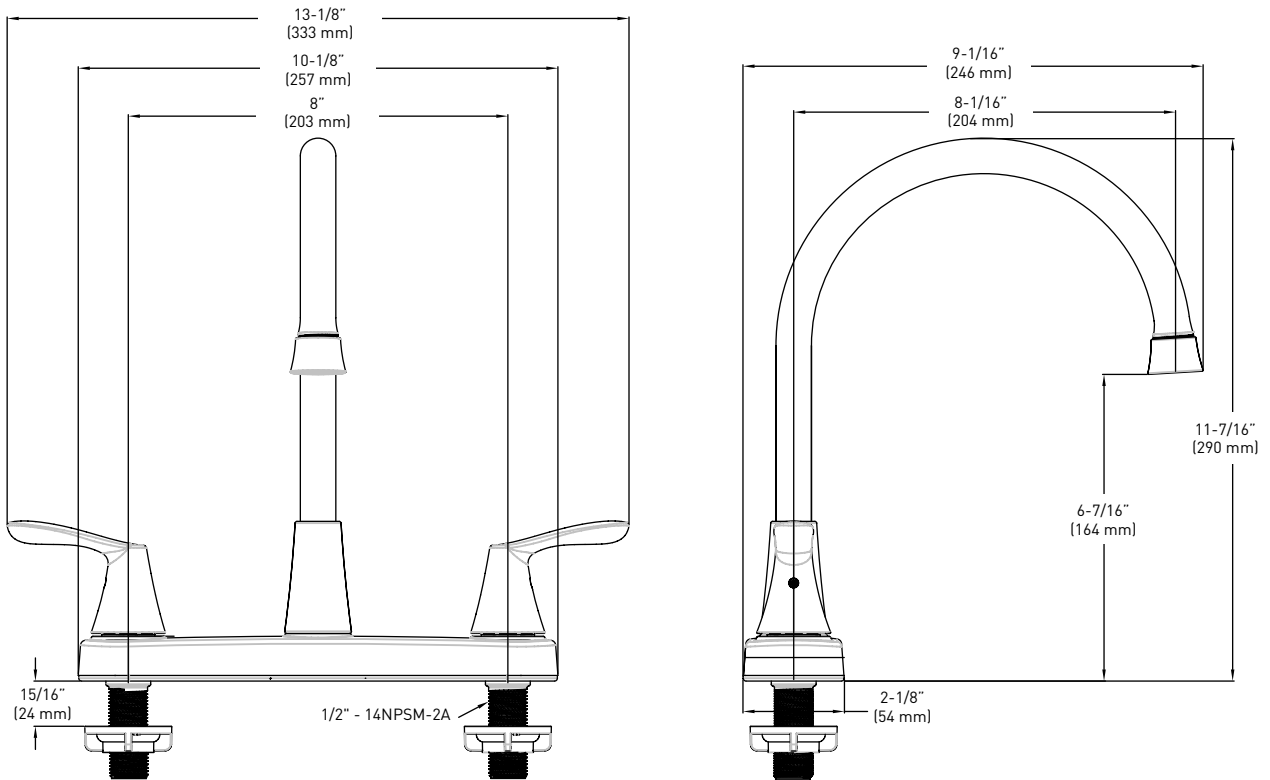

CONSTRUCTION

- › METAL CONSTRUCTION WITH POLISHED CHROME FINISH
- › PLASTIC VALVE BODY

MOUNTING

- › DESIGNED TO INSTALL THROUGH 3 HOLES, 7/8" (23 mm) MIN. DIA. WITH 8" (203 mm) CENTERS, ON DECKS UP TO 1-1/8" (28 mm)
- › DESIGNED TO INSTALL MIN. 1-11/16" (43 mm) FROM VALVE CENTERLINE TO BACK SPLASH

INLET

- › 1/2" - 14 NPSM THREADED MALE INLET SHANKS

OPERATION

- › QUARTER-TURN LEVER STYLE HANDLES
- › OPERATES WITH LESS THAN 5 LBS. OF FORCE

WATER-CONTROL MECHANISM

- › WASHERLESS CARTRIDGE

FLOW

- › AERATOR LIMITS MAXIMUM FLOW RATE TO 1.8 GPM MAX. (6.8 L/MIN.) @ 60 PSI

CODES/STANDARDS APPLICABLE

- › cUPC
- › ASME A112.18.1/CSA B125.1
- › ANSI/NSF 372

GUARANTEE

- › LIMITED LIFETIME WARRANTY AGAINST DEFECTS IN MATERIAL AND WORKMANSHIP TO ORIGINAL CONSUMER PURCHASER
- › 5 YEAR WARRANTY IF USED IN INDUSTRIAL, COMMERCIAL AND BUSINESS INSTALLATIONS



MEETS ADA STANDARDS

DESCRIPTION	POLISHED CHROME	CASE QTY.
INFINITY TWO HANDLE KITCHEN FAUCET WITH HIGH ARC SWING SPOUT	06-8705	6

