




FEATURES

- › SINGLE SETTING SHOWER HEAD
- › ACRYLIC HANDLES WITH HOT AND COLD TEMPERATURE INDEXING
- › WASHERLESS CARTRIDGE
- › SHOWER HEAD MAXIMUM FLOW RATE: 2.5 GPM/ 9.5 LPM @ 80 PSI

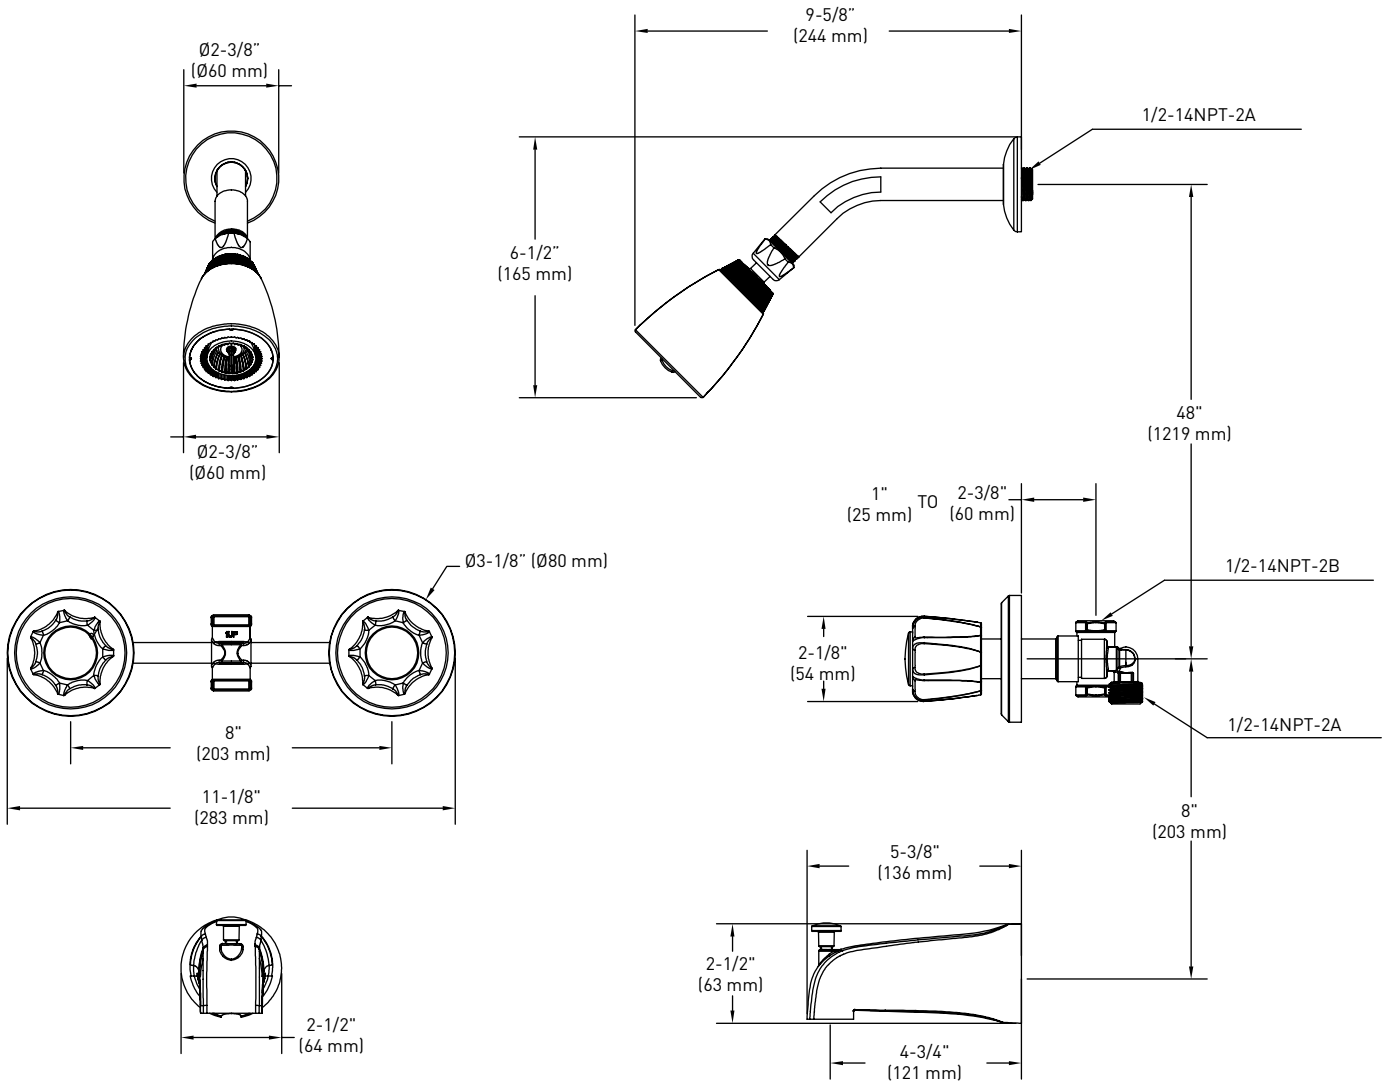

MEASUREMENTS SUBJECT TO A 3% VARIANCE

MEASUREMENTS ARE FOR REFERENCE ONLY. TAYMOR RESERVES THE RIGHT TO CHANGE THE PRODUCT SPECS WITHOUT NOTICE. FOR PRODUCT WARRANTY, PLEASE VISIT TAYMOR WEBSITE FOR DETAILS

MATERIAL

- › PREMIUM METAL CONSTRUCTION
- › BRASS VALVE BODIES

CODES/STANDARD

- › ASME A112.18.1/CSA B125.1
- › cUPC CERTIFIED



INSTALLATION

- › 1/2" CONNECTION SIZE SCREW-ON SPOUT

DESCRIPTION	POLISHED CHROME	CASE QTY.
TWO ACRYLIC HANDLE TUB & SHOWER FAUCET	06-9907	4

