Taymor | PRODUCT SPECIFICATIONS

SPECIFICATIONS

- UNIVERSAL 6-IN-1 LATCH: DRIVE IN, SQUARE MORTISE AND RADIUS CORNER WITH ADJUSTABLE BACKSET: 2-3/8" (60 mm) – 2-3/4" (70 mm)
- > INCLUDES ANTI-PRY COLLAR FOR REINFORCED SECURITY
- > HIGH TENSILE STEEL ANTI-SAW DEADBOLT WITH 1" THROW
- > STANDARD CENTER TO CENTER BORE DISTANCE: 5-1/2" (140 mm)
- STANDARD BORE HOLES: 2-1/8" (54 mm) ALSO FITS SMALL DEADBOLT BORE: 1-1/2" (38 mm)
- > FITS STANDARD EXTERIOR DOOR THICKNESS: 1-3/4" (45 mm)
- > FULL LIP RADIUS CORNER SPRING LATCH STRIKE WITH ADJUSTABLE TAB
- HIGH SECURITY DEADBOLT STRIKE

PREMIER








ANSI GRADE 2

 \bigcirc

LIFETIME MECHANICAL & FINISH WARRANTY

FULL KEYING SERVICES AVAILABLE

WR5 keyway, packaged in Keyed Different.

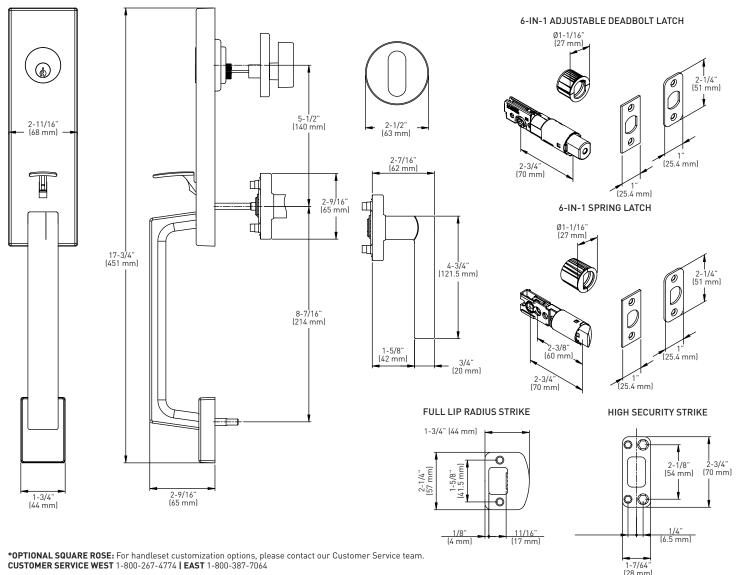

BUILDER PACK	SATIN NICKEL 15	MATTE BLACK 19	POLISHED CHROME 26	SATIN CHROME 26D	CASE QTY
	30-D1015SN	30-D1015BLK	30-D1015PC	30-D1015SC	4
RETAIL PACK					
	31-FV1015SN	31-FV1015BLK	-	-	4

